



item 5818921

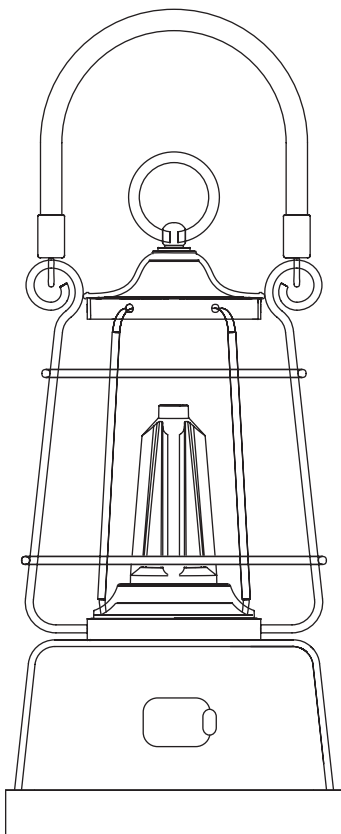

Main Lamp:

Rated power(W)	: 3.2W
Rated voltage(V)	: Dedicated for DC3V bulb
Dimming range(W)	: 10%~100%(0.3W~3.2W)
Colour temp(K)	: 2200~6500K (CCT Adjustable)
Colour Rendering Index(Ra)	: Ra≥80
Luminous flux(Lm)	: 20~250lm
USB output/charging input	: 5V/1A
Battery type	: Lithium battery 18650*2pcs / AA*3
Battery capacity(mAh)	: According to their own conditions
Charging time(H)	: ≥7hours(only support 18650 Li-on battery)
Endurance time(H)	: 8~75 Hours(Li-on battery 5000mAh)
Working temp(°C)	: -20°C~60°C
Working humidity(%)	: ≤95%
Storage condition	: Dry ventilated place
Whole light weight(g)	: 600g
Size	: 126*230mm
Light body materials	: Plastic + Iron + Bamboo
IP rating(IP)	: IPX4

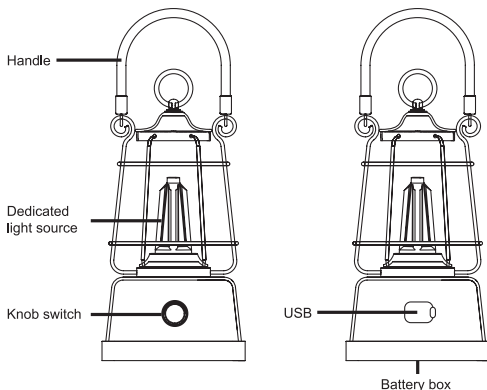

Product details:

Knob switch

- A: Press the knob for 1s to turn on the lamp. The default lighting mode is warmlight (2200K), clockwise rotate for better light, counter rotate for lower light !
- B: It takes 3~4 laps of rotating for the lamp to reach maxium brightness.
- C: Quick press the knob for Color Temperature adjustment. clockwise rotate for warm white to Cool white (high CCT), counter rotate for cool white to warm white(low CCT).
CCT range: 2200K~6500K.


Attention:

Long press the knob is for power ON/OFF.

Short press for Dimmable / CCT adjustment!

USB

As the below picture shown, open the rubber cover:



DC 5V adaptor (not included)
Do not use unmatched adaptor

The green indicator flickers say power charging, green light going on say full with power.

When the USB output interface is used for external equipment charging, the red indicator going on and the indicator flicker means power off.

Notice: USB output interface is not available during charging.

Notes:

1. Only for DC+5V adaptor.
2. Do not be directly exposed to rain water.
3. To prevent it from battery damage as overfall, please charge timely when power off.
4. Please charge once per three months if not use for quite some time.
5. To prevent it from water and dust contaminant, please cover the USB output interface with waterproof film when it not in use.
6. In order to avoid accidents, please do not put it into fire.
7. Please store in a dry and ventilated place.

